


DATASHEET

MTP®/APC(M)-LC Fanout cable OS2 12 fibers Typ B LSZH yellow 0,4m

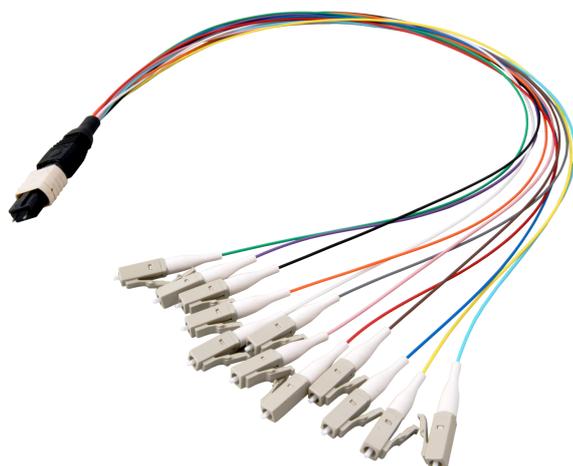

General data

Application: Suitable for transmission links up to **100 Gigabit**

Construction: 1 multi-connector MTP® on one side,
12 Single connector on the other side (e.g. LC)

LowLoss version: attenuation per Fanout max. 0,35dB

Matrix: 12 fibers

Cable diameter single-connector: 900µm

Colour: OM4, OM3 and OS2 acc. to colour code DIN VDE 0888

MTP Singlemode connectors are in APC version

Technical properties

Category	OS2
Connector connection 1	MTP-M
Connector connection 2	LC
Crossed	False
Fibre type	OS2 9/125
Flame retardant	according to EN 50265-2-1
Halogen free (according to EN 50267-2-3)	True
With rodent protection	False

Available variants

This datasheet was created automatically on 03-02-2026 . Technical changes reserved.




DATASHEET

MTP®/APC(M)-LC Fanout cable OS2 12 fibers Typ B LSZH yellow 0,4m

ArtNr.	Bezeichnung	Length	Number of connectors connection 1	Number of connectors connection 2	Number of fibres
MTPM12LCOS2-0,4	MTP®/APC(M)-LC Fanout cable OS2 12 fibers Typ B LSZH yellow 0,4m	0.4 m	1 x MTP® male	12 x LC	12
MTPM12LCOS2-1	MTP®/APC(M)-LC Fanout cable OS2 12 fibers Typ B LSZH yellow 1m	1.0 m	1 x MTP® male	12 x LC	12




Drawings

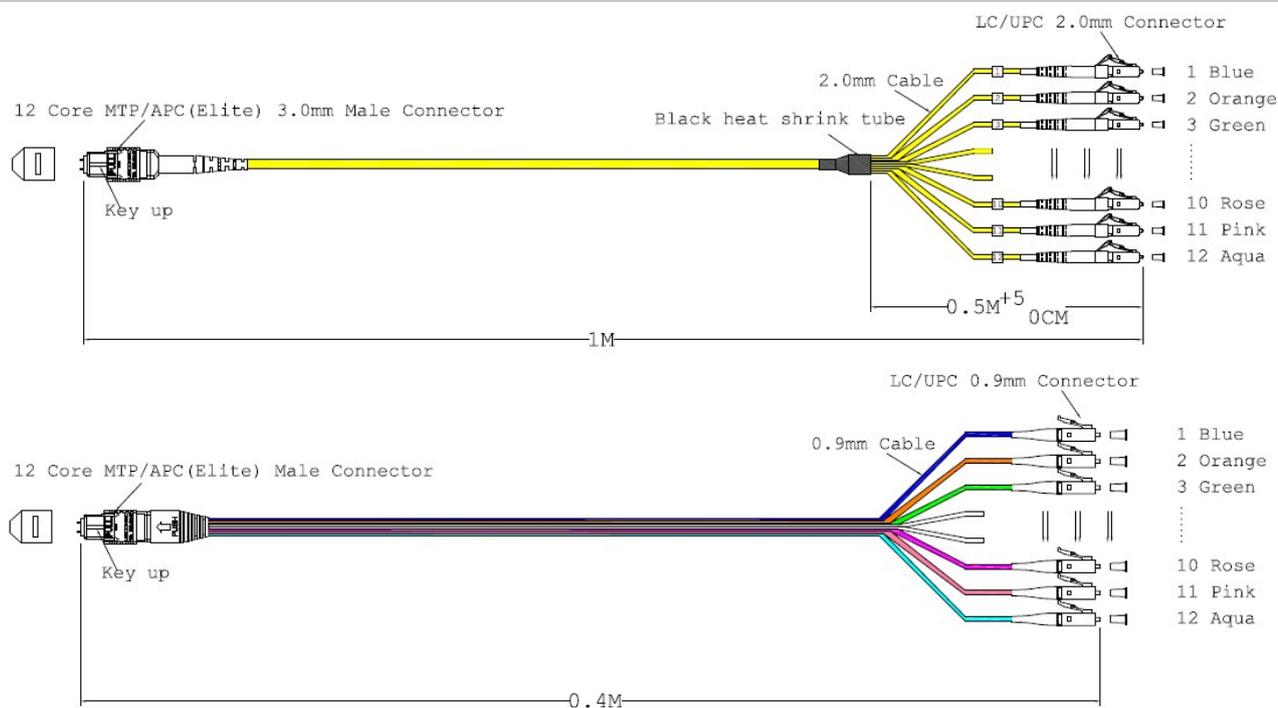

This datasheet was created automatically on 03-02-2026 . Technical changes reserved.

DATASHEET

MTP®/APC(M)-LC Fanout cable OS2 12 fibers Typ B LSZH yellow 0,4m

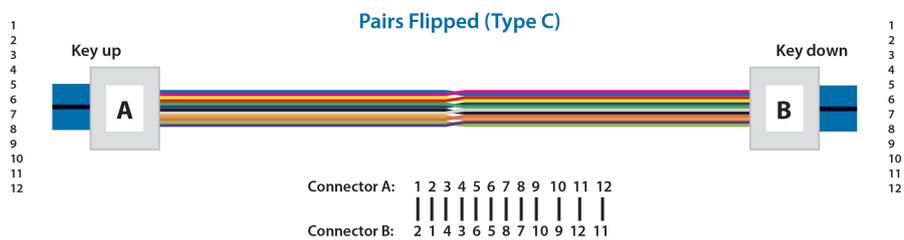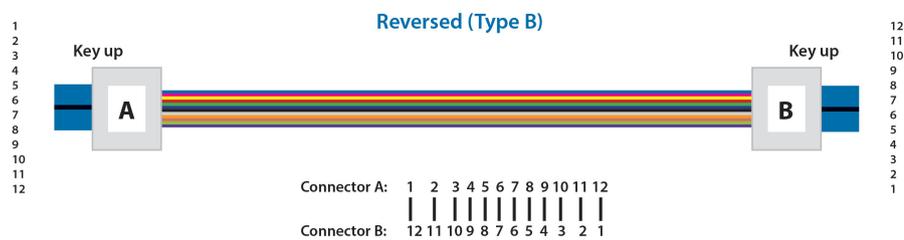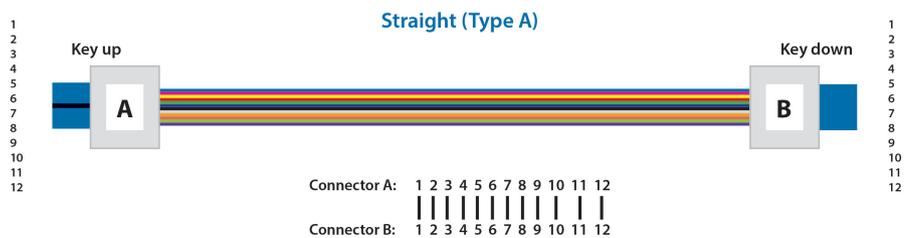

This datasheet was created automatically on 03-02-2026 . Technical changes reserved.

