



Name of product:


CobiCabling Cable CAT. 6A/7 U/FTP 700MHz outdoor PE Fca 500m RL

Part number:

C23-1930

FEATURES:

- 700MHz frequency (CAT. 6A, 7)
- Length marker every 1m
- Outdoor cable with PE sheath
- Individually shielded pairs

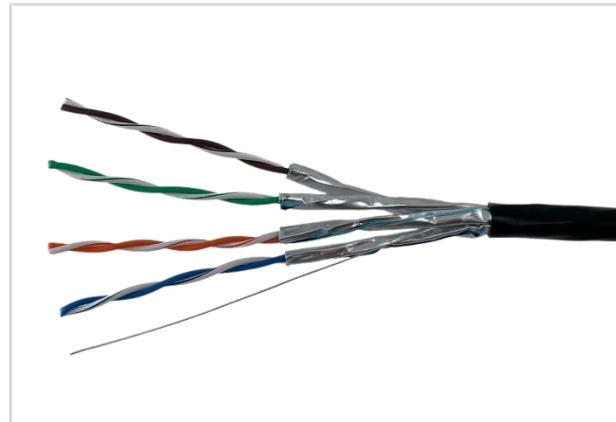

PRODUCT DESCRIPTION:

CobiCabling cable is designed to exceed requirements of EN 50173-1:2018-07, EN 50173-1:2018, ISO/IEC 11801:2017 with additional margin in all parameters. Our cable is used in high-speed networks, including 10 Gigabit Ethernet. Thanks to its PE outer sheath, the cable will be perfect for outdoor installations.

COMPLIANCE WITH THE REQUIREMENTS OF STANDARDS:

- EN 50173-1:2018
- EN 50173-1:2018-07
- ISO/IEC 11801:2017
- ANSI/TIA-568-D.0/D.1/D.2
- IEC 60754-2/A1:2020
- PN-EN 60332-1/A12:2021

TYPICAL APPLICATIONS:

- 10GBase-T 10 Gigabit Ethernet;
- Composite Video;
- Poe, Poe+, 4PPoE

Feature	Values
Frequency	Tested to 700MHz
Outer sheath	PE black colour
Compatible with	6A, 7
Shielding	U/FTP
Length marking	from 500 to 0 (marked every 1m)
NVP	74% (0,74)
Outer diameter	7,2mm ($\pm 0,3$ mm)
Conductor diameter	23AWG
Euroclass	Fca
Temperature range	During installation -10°C do +50°C, During operation -30°C do +80°C