

Data sheet



Features

- C19 Self-Lock: compact, versatile, ideal for server applications
- Automatic locking: Locks when plugged in – no extra effort required.
- Quick release: simply press the button.
- Maximum reliability: minimises downtime in sensitive environments.



Description

The CEE 7/7 (180°) to C19 (180°) power cable ensures a safe and reliable power supply for high-performance IT and server equipment in data centers, industrial facilities, and professional environments. The integrated release mechanism prevents accidental disconnection and ensures maximum operational safety. The C19 plug with lock provides a secure hold and minimizes contact problems. Robust workmanship makes the cable ideal for professional use.

Connections

Connection 1	CEE7/7
Orientation 1	180°
Case 1	Plastic overmolded
Case color 1	black
Connection 2	C19
Orientation 2	180°
Case 2	Plastic overmolded
Case color 2	black


Cable

Typ	Round Cable
Inner conductor material	Copper
Outer jacket material	PVC
Outer diameter	8.3±0.3 mm
Color outer jacket	black



Standards

Approval	KEMA-KEUR, ENEC
Compliance	RoHS Reach CE
Temperature range	-15°C ~ +70°C

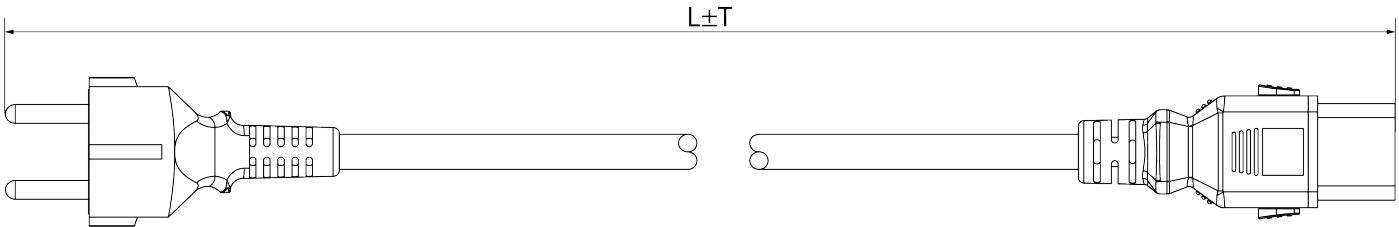

Item No.	Length	Tolerance	Cross section	EAN
7132-L-2,0M	2.0 m	+30/-30 mm	3G 1.5mm ²	4260424514255
7132-L-3,0M	3.0 m	+30/-30 mm	3G 1.5mm ²	4260424514262
7132-L-5,0M	5.0 m	+30/-30 mm	3G 1.5mm ²	4260424514279

