


DATASHEET

RJ45 Patch Cord Cat.6A S/FTP LSZH black 0,15m

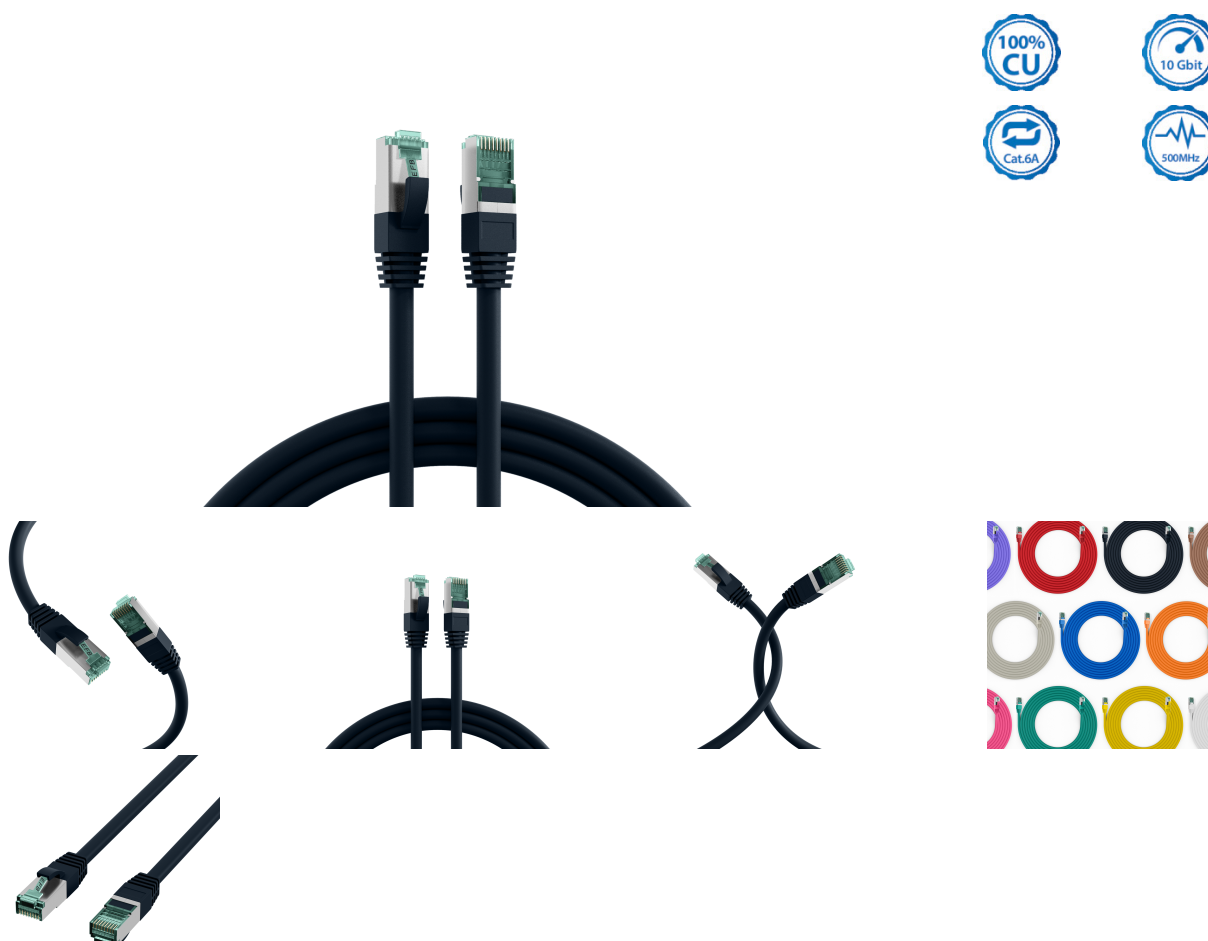

General data

RJ45 patch cable Cat.6A S/FTP LSZH

The Cat.6A (TIA) patch cable meets the requirements for 10Gbit Ethernet and has gold-plated contacts.

Technical product features

- Cat.6A (TIA)
- S/FTP cable with AWG26/7
- Sheath material made of halogen-free LSZH
- Fire protection: flame-retardant, halogen-free , low smoke
- Plug connection: RJ45 to RJ45
- With locking lever protection
- Has gold-plated contacts

This datasheet was created automatically on 28-11-2025 . Technical changes reserved.



DATASHEET

RJ45 Patch Cord Cat.6A S/FTP LSZH black 0,15m

The jacket of the shielded patch cable is made of halogen-free LSZH material and has a long imprint on the grommet. The cable also offers the option of power supply via PoE according to IEEE802.3af, PoE+ according to IEEE802.3at and 4PPoE according to IEEE802.3bt.

The assignment of the yellow RJ45 plugs is according to TIA/EIA 568B and is 1: 1. Suitable for the temperature range -20 - 60 °C.

The network cable has a conductor material made of copper and is ideal for use in structured building cabling, industrial Ethernet and in data centers. The frequency range is 500MHz.

Technical properties	
AWG-size	27/7
Allocation	acc. TIA/EIA 568B
Anti-kink sleeve	moulded-on
Area of application	Data center
Bending radius	30 mm
Cable construction	4x2
Cable shape	rund
Cable type	S/FTP
Cabling standard	ANSI/TIA-568
Category	6A (TIA)
Colour anti-kink sleeve	black
Colour outer sheath	black
Conductive shield	Selected shield contact
Conductor Material	Copper
Conductor resistance DC	185 Ω/km
Connector	IEC 60603-7-51
Connector type	RJ45 standard green
Contact Resistance	30 mΩ
Contacts	Gold plated
Current capacity	max. 1 A
Fire retardant version	acc. IEC60332-1
Halogen free	acc. IEC60754-2
Harmonised Standard	EN 50575
Impedance	100 ±15 Ω
Insulation Resistance	10 MΩ
Jacket material	LSZH
Length imprint	True
Locking lever	True

This datasheet was created automatically on 28-11-2025 . Technical changes reserved.



DATASHEET

RJ45 Patch Cord Cat.6A S/FTP LSZH black 0,15m

Loop resistance	370 Ω/km
Low smoke	nach IEC61034
Mating cycles	≥750
Model	shielded
NVP value	74 %
Oil resistant	no
Operating Temperature	-20 - 60 °C
Operating-/ tempering voltage	max. 50 V DC
Outer diameter of the cable	6.0 mm
Ozone resistance	No
Pin assignment	1:1
Printing	Cat.6A PATCH S/FTP 4x2xAWG27/7 LSZH ISO/IEC11801 ANSI/TIA-568-C.2 ***10Gigabit Ethernet*** www.efb-elektronik.de
Raw cable	Cat.6A
Resistance unbalance	3 %
Resistant to chemicals	False
Silicone-free	True
Suitable for degree of protection (IP)	IP20
Tape width	500MHz
Test voltage	1000 (V DC, 1min) core/core und core/screen
Total screening	80 %
Transmission	10Gbit
Type of connector connection 1	RJ45 8(8)
Type of connector connection 2	RJ45 8(8)
UL approbated	False
UV resistant	no

Available variants

ArtNr.	Bezeichnung	Length POE class		Length tolerance
MK6001.0,15B	RJ45 Patch Cord Cat.6A S/FTP LSZH black 0,15m	0.15 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
MK6001.0,25B	RJ45 Patch Cord Cat.6A S/FTP LSZH black 0,25m	0.25 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
MK6001.0,5B	RJ45 Patch Cord Cat.6A S/FTP LSZH black 0,5m	0.5 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %

This datasheet was created automatically on 28-11-2025 . Technical changes reserved.



DATASHEET

RJ45 Patch Cord Cat.6A S/FTP LSZH black 0,15m

MK6001.1B	RJ45 Patch Cord Cat.6A S/FTP LSZH black 1m	1.0 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
MK6001.1,5B	RJ45 Patch Cord Cat.6A S/FTP LSZH black 1,5m	1.5 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
MK6001.2B	RJ45 Patch Cord Cat.6A S/FTP LSZH black 2m	2.0 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
MK6001.3B	RJ45 Patch Cord Cat.6A S/FTP LSZH black 3m	3.0 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
MK6001.5B	RJ45 Patch Cord Cat.6A S/FTP LSZH black 5m	5.0 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
MK6001.7,5B	RJ45 Patch Cord Cat.6A S/FTP LSZH black 7,5m	7.5 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
MK6001.10B	RJ45 Patch Cord Cat.6A S/FTP LSZH black 10m	10.0 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
MK6001.15B	RJ45 Patch Cord Cat.6A S/FTP LSZH black 15m	15.0 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at	±5 %
MK6001.20B	RJ45 Patch Cord Cat.6A S/FTP LSZH black 20m	20.0 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at	±5 %
MK6001.25B	RJ45 Patch Cord Cat.6A S/FTP LSZH black 25m	25.0 m	PoE acc. to IEEE802.3af	±5 %
MK6001.30B	RJ45 Patch Cord Cat.6A S/FTP LSZH black 30	30.0 m	PoE acc. to IEEE802.3af	±5 %
MK6001.40B	RJ45 Patch Cord Cat.6A S/FTP LSZH black 40m	40.0 m	No	±5 %
MK6001.50B	RJ45 Patch Cord Cat.6A S/FTP LSZH black 50m	50.0 m	No	±5 %


Drawings

This datasheet was created automatically on 28-11-2025 . Technical changes reserved.



DATASHEET

RJ45 Patch Cord Cat.6A S/FTP LSZH black 0,15m

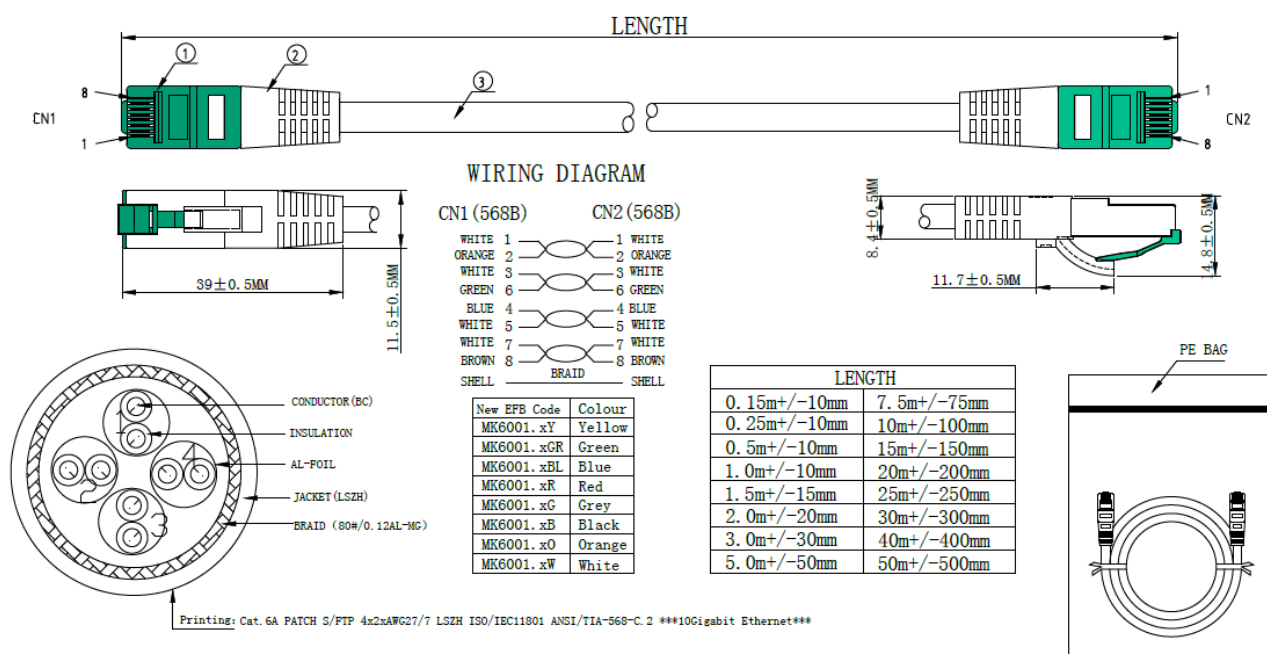

This datasheet was created automatically on 28-11-2025 . Technical changes reserved.