


DATASHEET

Duplex Patchcable SC-ST OS2 G652D 7,5m LSZH 3mm yellow

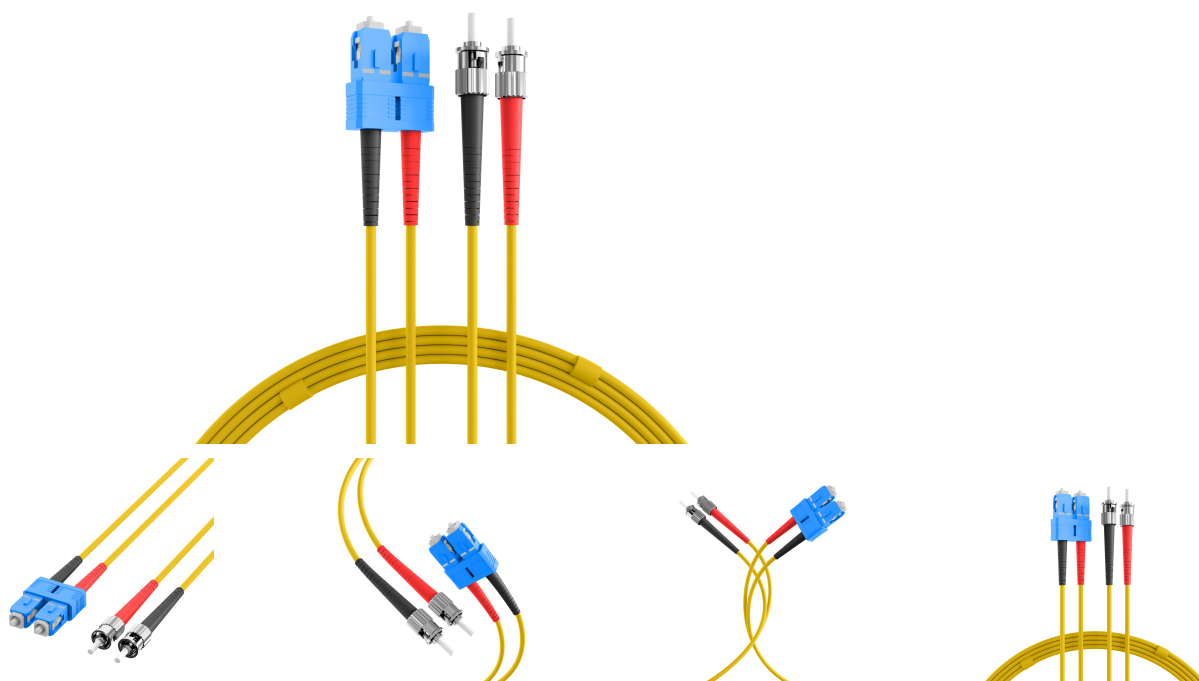

General data

Fiber jumper are well defined components in international standard of structured cabling ISO/IEC11801. Due to many different network protocols created in the last 25 years , also a wide range of connectors had been developed. Some of them are still important today: LC, SC, E2000®, MPO/MTP.

Fiber jumper (patchcord) are defined as shortest connection between passive interface and active deviceport, regarding structured cabling standard. Rating of performance, known as category, as well as performance of total transmission channel, known as link class, Similar descriptions for patchcords: Connection cable, drop cable, adapter cable, interconnecting cord, Jumper

Features of EFB fiber optic patch cables

Tension relief reinforced with aramid yarn

Halogen-free and flame-retardant sheath according to IEC-60754-2, IEC-60332-1 and IEC-61034

EFB fiber optic connectors meet the minimum quality class Grade B/2 according to IEC-61753-1 for singlemode and Grade A/1 for multimode according to IEC 61753-122-2 (UPC cut)

100% tested and with individual measurement report

Technical properties

APC version	False
Anti-kink sleeve	put-on

This datasheet was created automatically on 29-11-2025 . Technical changes reserved.



DATASHEET

Duplex Patchcable SC-ST OS2 G652D 7,5m LSZH 3mm yellow

Bend optimized fiber	no
Cable Conform to Standard	IEC 60793-2
Cable structure	Duplex
Cable type	I-V(ZN) H
Cable Ø	3.0 mm
Category	OS2 G652D
Colour outer sheath	yellow
Connector colour 1	blue
Fibre type	Singlemode 9/125
Flame retardant	according to EN 50265-2-1
Halogen free	acc. IEC60754-1
Halogen free (according to EN 50267-2-3)	True
Jacket material	LSZH
Low smoke	acc. IEC61034-1
Max. Tension	160 N
Min. Bending radius (Dynamic)	20xOD
Min. Bending radius (Static)	10xOD
Number of fibers	2
Operating Temperature	-20 - 75 °C
Quality class singlemode	B/2 acc. IEC 61753-1
Storage Temperature	-20 - 85 °C
Type of connector connection 1	SC duplex
Type of connector connection 2	ST

Available variants

ArtNr.	Bezeichnung	Length Length tolerance	
O2073.0,5	Duplex Patchcable SC-ST OS2 G652D 0,5m LSZH 3mm yellow	0.5 m	±5 %
O2073.1	Duplex Patchcable SC-ST OS2 G652D 1m LSZH 3mm yellow	1.0 m	±5 %
O2073.2	Duplex Patchcable SC-ST OS2 G652D 2m LSZH 3mm yellow	2.0 m	±5 %
O2073.3	Duplex Patchcable SC-ST OS2 G652D 3m LSZH 3mm yellow	3.0 m	±5 %
O2073.5	Duplex Patchcable SC-ST OS2 G652D 5m LSZH 3mm yellow	5.0 m	±5 %
O2073.7,5	Duplex Patchcable SC-ST OS2 G652D 7,5m LSZH 3mm yellow	7.5 m	±5 %
O2073.10	Duplex Patchcable SC-ST OS2 G652D 10m LSZH 3mm yellow	10.0 m	±5 %
O2073.15	Duplex Patchcable SC-ST OS2 G652D 15m LSZH 3mm yellow	15.0 m	±5 %
O2073.20	Duplex Patchcable SC-ST OS2 G652D 20m LSZH 3mm yellow	20.0 m	±5 %
O2073.25	Duplex Patchcable SC-ST OS2 G652D 25m LSZH 3mm yellow	25.0 m	±5 %

This datasheet was created automatically on 29-11-2025 . Technical changes reserved.




DATASHEET

Duplex Patchcable SC-ST OS2 G652D 7,5m LSZH 3mm yellow

O2073.30	Duplex Patchcable SC-ST OS2 G652D 30m LSZH 3mm yellow	30.0 m	±5 %
O2073.35	Duplex Patchcable SC-ST OS2 G652D 35m LSZH 3mm yellow	35.0 m	±5 %
O2073.40	Duplex Patchcable SC-ST OS2 G652D 40m LSZH 3mm yellow	40.0 m	±5 %
O2073.50	Duplex Patchcable SC-ST OS2 G652D 50m LSZH 3mm yellow	50.0 m	±5 %

Drawings

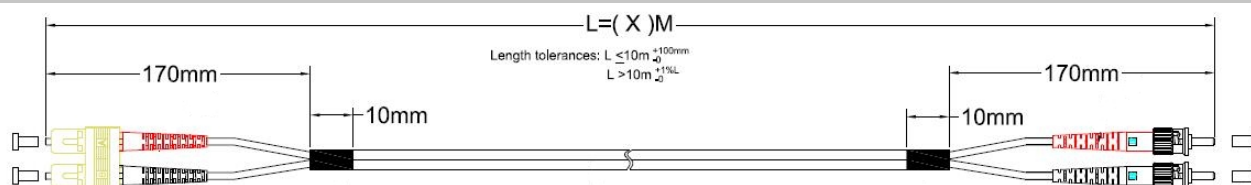

This datasheet was created automatically on 29-11-2025 . Technical changes reserved.