


DATASHEET

CAT.6A 24-Port Patch-Panel 19" 1U armed with mounting-adapter

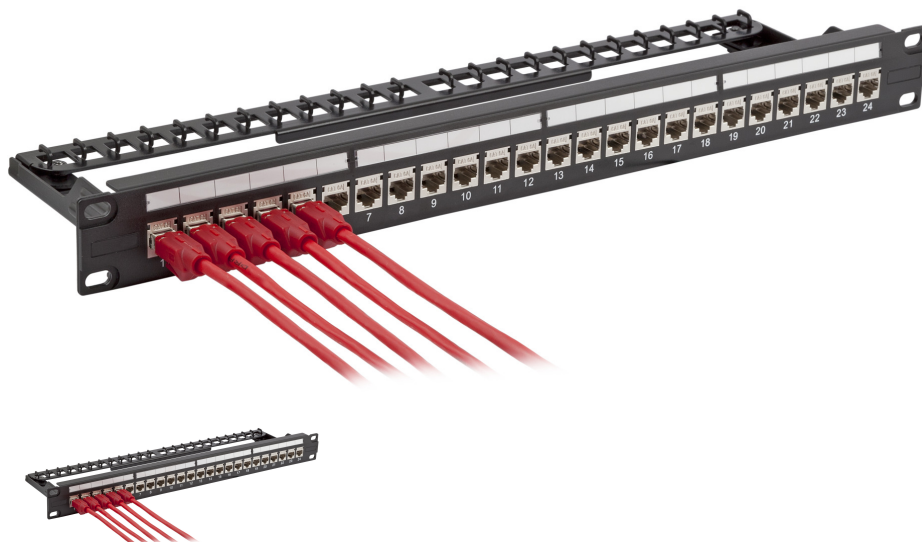

General data

- Mounting-Adapter: Cat.6A Snap-In 10 Gbit RJ45 jack/RJ45 jack (37521.1)
- Incl. Cable management
- Strain relief via cable tie

Technical properties

Category	6A (TIA)
Colour code	acc. TIA/EIA 568A/B
Connection type	Keystone
Contact Resistance	< 20 mΩ
Contact coating	50 μ" gold plated
Current capacity	1.5 A
Depth	125.0 mm
Dielectric Withstanding Voltage	1000 V AC 60Hz
Electrical strength	125 V AC RMS
Height	44.5 mm
Housing material Panel	Steel
Housing material of RJ45 jacks	PBT
Insertion force	≤ 30 N
Insulation Resistance	500 MΩ
Mating cycles RJ45 jack	750

This datasheet was created automatically on 06-02-2026 . Technical changes reserved.



DATASHEET

CAT.6A 24-Port Patch-Panel 19" 1U armed with mounting-adapter

Mounting method	482.6 mm (19 inch) mounting
Number of height units	1 U
POE Standard	POE+
Screened	True
Suitable for number of connectors	24
Tape width	500 MHz
Temperature Range (Operation)	-10 - 60 °C
Temperature Range (Storage)	-40 - 70 °C
Transmission	10 Gbit
Type of connector	RJ45 8(8)
Width	483.0 mm

Available variants

ArtNr.	Bezeichnung	Color	Number of buses/couplings	RAL number
37598.1	CAT.6A 24-Port Patch-Panel 19" 1U armed with mounting-adapter	black	24	9005

This datasheet was created automatically on 06-02-2026 . Technical changes reserved.

