






DATASHEET

RJ45 Keystone UTP, Cat.6, 250MHz, component certified, white

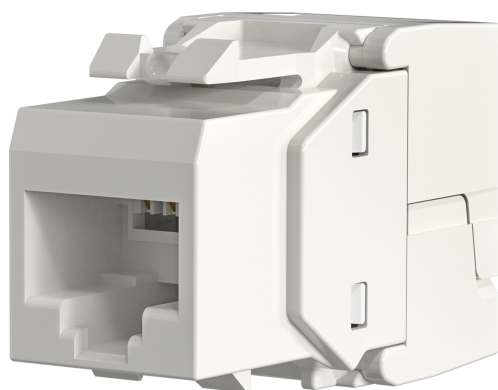

General data

Specifications:

Plastic housing PC+ABS
 Compact cable presorter for AWG 24/1 .. 22/1
 Pair management according to TIA 568A /B colour codes
 Appropriate for distribution panels and frames with keystone slots

Scope of delivery:

1 x RJ45 keystone, Cable coder, 1 x hinged dust cover, 1 x cable tie, 1 x mounting instruction

Technical properties

360° shield contact	False
4PPOE certified	True
AWG-range	24 - 22
Cable diameter	8.5 mm
Casing material	Plastic
Category	6
Complaint to UL94	V-0

This datasheet was created automatically on 13-05-2026 . Technical changes reserved.



DATASHEET

RJ45 Keystone UTP, Cat.6, 250MHz, component certified, white

Connection type	Insulation displacement connector
Contact Resistance	≤ 20 mΩ
Contact coating	50 μ"
Current capacity	2 A
Dielectric Withstanding Voltage	1000 V AC 60Hz
Dust cover	Yes
For UAE suitable	False
Insertion force	≤ 30 N
Insulation Resistance	≥ 500 MΩ
Mating cycles	≥ 750
Model	jack
Operating Temperature	-10 - 60 °C
Screened	False
Shield contact and strain relief separate	False
Special tool necessary	False
Suitable for flat cable	False
Suitable for litz wire conductor	True
Suitable for round cable	True
Suitable for solid core	True
Type of connector	RJ45 8(8)
Type of locking	Latching mechanism

Available variants

ArtNr.	Bezeichnung	Color
E-20080	RJ45 Keystone UTP, Cat.6, 250MHz, component certified, white	white
E-20081	RJ45 Keystone UTP, Cat.6, component certified, black	black

This datasheet was created automatically on 13-05-2026 . Technical changes reserved.

