

ULTRAFLEX POWER CABLE C13 180° / C14 180°


Ultraflexible cable material

Outstanding laying properties

Robust, durable, and reliable

Safe contacting

Complies with EU safety standard

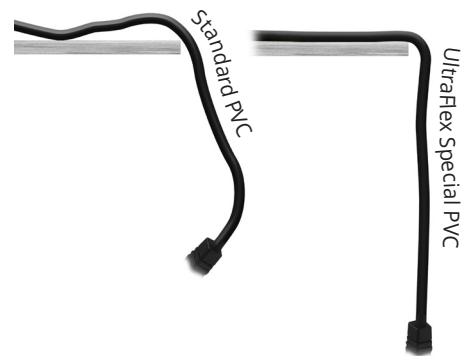

Specification

Connector 1: C13 180° (straight)

Connector 2: C14 180° (straight)

Conductors: 3x, colour code: blue, brown, yellow/green ICC, \varnothing : 0.75mm² 6.8±0.15mm

Cable material: H05VV, special PVC, colour: matt black (similar RAL 9005)

Technical Data / Tests


Temperature range: -20°C up to +70°C

Voltage: 250V, 10A

Tests: Conductivity, insulation, high voltage

Certifications

KEMA, KC, UL, CUL, ENEC, CCC, PSE, SAA, VDE, NSW, CE

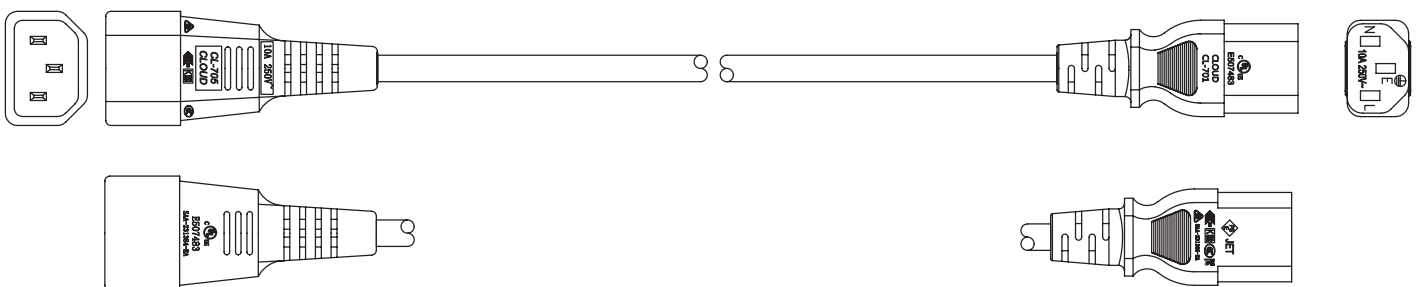

Art. No.

7100-1,0M-UF

EAN No.

4260310267616

Length in mm

1000

± Tolerance in mm

20

