

DATASHEET

FTTH IP65 Connectionbox for 8fiber, 4adapter and Fiber overlength box



General data

Application:

Optical Telecommunication Networks
 LAN, Optical fiber Communication Network
 CATV Networks
 FTTH access Network
 PON, G-PON

Configuration in LC with duplex adapters for 8 ports/ fibers

Configuration in SC with simplex adapters for 4 ports/ fibers

This datasheet was created automatically on 28-02-2025 . Technical changes reserved.

DATASHEET

FTTH IP65 Connectionbox for 8fiber, 4adapter and Fiber overlength box

Delivery unassembled (**Crimp splice holder (12 splices)**, shrink splice holder (max. 8 splices double layed), 4x shrink protection and material for wall mounting included)

Allgemeine Daten	
Holder for splitter	False
With Fiber overlength cassette	True
Suitable for adapter	SC Simplex/LC Duplex/E2000®
Scope of application	Outdoor
Mounting method	Wall mounting
Holder for gas blocker	False
Type of Splice protection	Crimp & Thermo
UV-resistant	True
Number of Fibres	8

General data	
Colour	white
Max. Assembly (Adapter)	4
Cable sheath support	True
Hinged splice cassette	True
Cable entry without cable gland	1x max. 10mm / 4x max. 4mm
Possibility of mast mounting	False

Mechanical characteristics	
IP Protection	IP65
Foreign body and contact protection	Protection against ingrees of dust

Mechanische Eigenschaften	
Water protection	Protection against jet water

Abmessungen	
Dimension	172x136x40 mm

Environmental conditions	
Temperature range	-25 - 70 °C

This datasheet was created automatically on 28-02-2025 . Technical changes reserved.


DATASHEET

FTTH IP65 Connectionbox for 8fiber, 4adapter and Fiber overlength box

Available variants

ArtNr.	Bezeichnung	Access Control
FTTH-BOX-OUT-3	FTTH IP65 Connectionbox for 8fiber, 4adapter and Fiber overlength box	Special screw/ Seal

Drawings

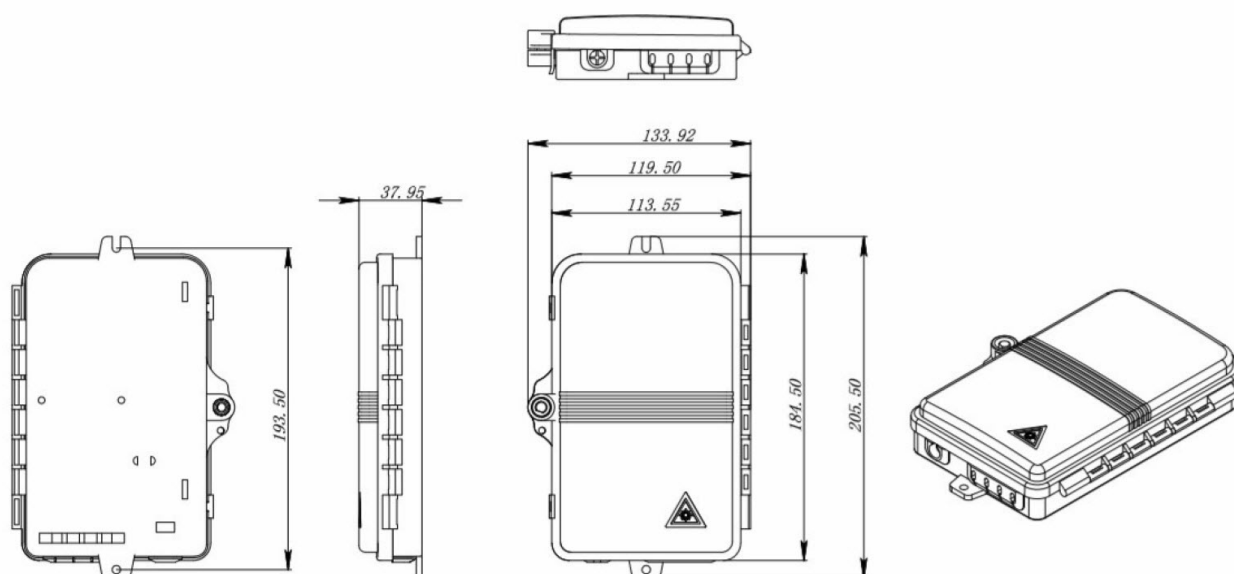

This datasheet was created automatically on 28-02-2025 . Technical changes reserved.