


DATASHEET

RJ45 Patch Cord Cat.6A S/FTP LSZH violet 50m

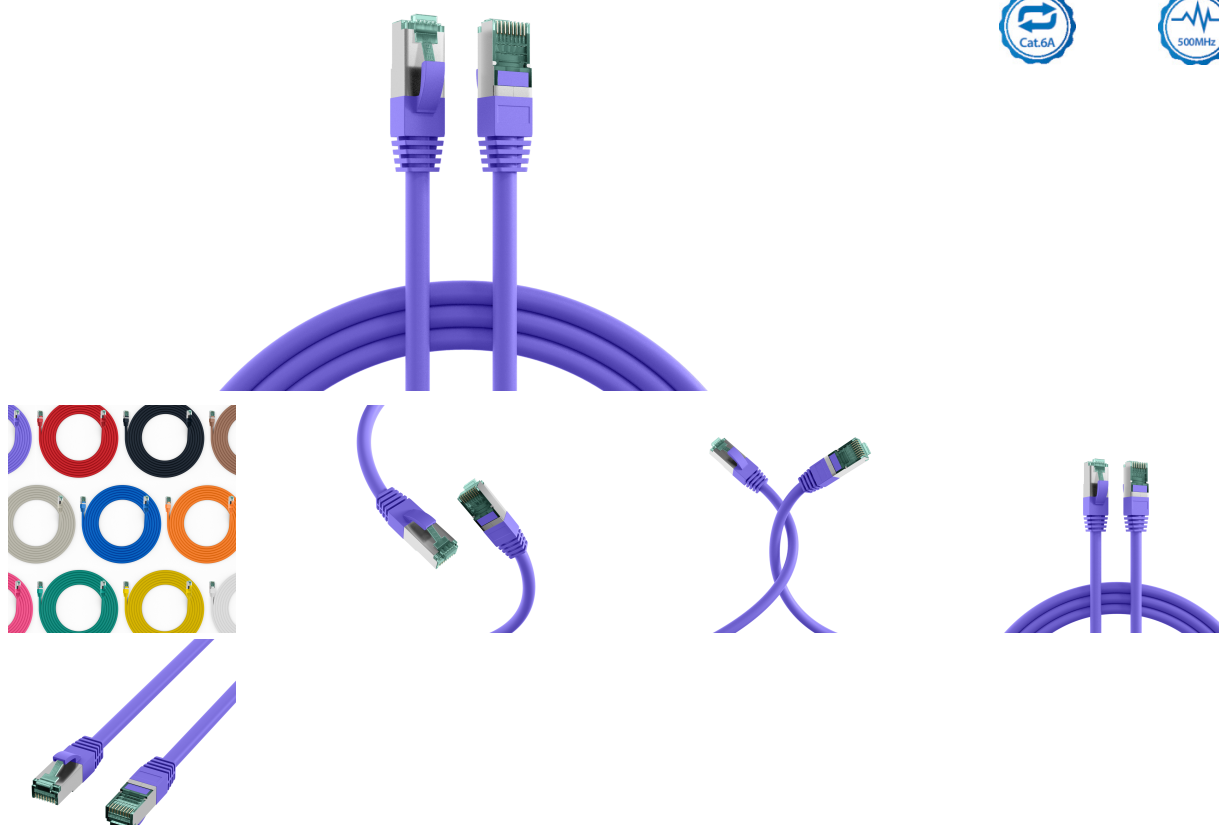

General data

RJ45 patch cable Cat.6A S/FTP LSZH

The Cat.6A (TIA) patch cable meets the requirements for 10Gbit Ethernet and has gold-plated contacts.

Technical product features

- Cat.6A (TIA)
- S/FTP cable with AWG27/7
- Jacket material made of halogen-free LSZH
- Fire protection: flame-retardant, halogen-free, low smoke
- Plug connection: RJ45 to RJ45
- With locking lever protection
- Has gold-plated contacts

This datasheet was created automatically on 28-11-2025 . Technical changes reserved.



DATASHEET

RJ45 Patch Cord Cat.6A S/FTP LSZH violet 50m

The sheath of the shielded patch cable is made of halogen-free LSZH material and has a length imprint on the grommet. In addition, the cable offers the option of power supply via PoE according to IEEE802.3af, PoE+ according to IEEE802.3at and 4PPoE according to IEEE802.3bt.

The assignment of the green RJ45 plugs is according to TIA/EIA 568B and is 1 :1. Suitable for the temperature range -20 - 60 °C.

The network cable has a conductor material made of copper and is ideal for applications in structured building cabling, industrial Ethernet and in data centers. The bandwidth is 500 MHz.

Technical properties	
AWG-size	27/7
Allocation	acc. TIA/EIA 568B
Anti-kink sleeve	moulded-on
Area of application	Data center
Bending radius	30 mm
Cable construction	4x2
Cable type	S/FTP
Cabling standard	ANSI/TIA-568
Category	6A (TIA)
Colour anti-kink sleeve	violett
Colour outer sheath	purple
Conductive shield	Selected shield contact
Conductor Material	Copper
Conductor resistance DC	185 Ω/km
Connector	IEC 60603-7-51
Connector type	RJ45 standard green
Contact Resistance	30 mΩ
Contacts	Gold plated
Current capacity	max. 1 A
Fire retardant version	True
Halogen free	True
Impedance	100 ±15 Ω
Insulation Resistance	10 MΩ
Jacket material	LSZH
Length imprint	True
Locking lever	True
Loop resistance	370 Ω/km
Low smoke	True

This datasheet was created automatically on 28-11-2025 . Technical changes reserved.



DATASHEET

RJ45 Patch Cord Cat.6A S/FTP LSZH violet 50m

Mating cycles	≥750
Model	shielded
NVP value	74 %
Oil resistant	no
Operating Temperature	-20 - 60 °C
Operating-/ tempering voltage	max. 50 V DC
Outer diameter of the cable	6.0 mm
Ozone resistance	No
Pin assignment	1:1
Printing	Cat.6A PATCH S/FTP 4x2xAWG27/7 LSZH ISO/IEC11801 ANSI/TIA-568-C.2 ***10Gigabit Ethernet*** www.efb-elektronik.de
Raw cable	Cat.6A
Resistance unbalance	3 %
Resistant to chemicals	False
Silicone-free	True
Suitable for degree of protection (IP)	IP20
Tape width	500MHz
Test voltage	1000 (V DC, 1min) core/core und core/screen
Total screening	80 %
Transmission	10Gbit
Type of connector connection 1	RJ45 8(8)
Type of connector connection 2	RJ45 8(8)
UL approved	False

Available variants

ArtNr.	Bezeichnung	Length	POE class	Length tolerance
MK6001.50V	RJ45 Patch Cord Cat.6A S/FTP LSZH violet 50m	50.0 m	No	±5 %


Drawings

This datasheet was created automatically on 28-11-2025 . Technical changes reserved.



DATASHEET

RJ45 Patch Cord Cat.6A S/FTP LSZH violet 50m

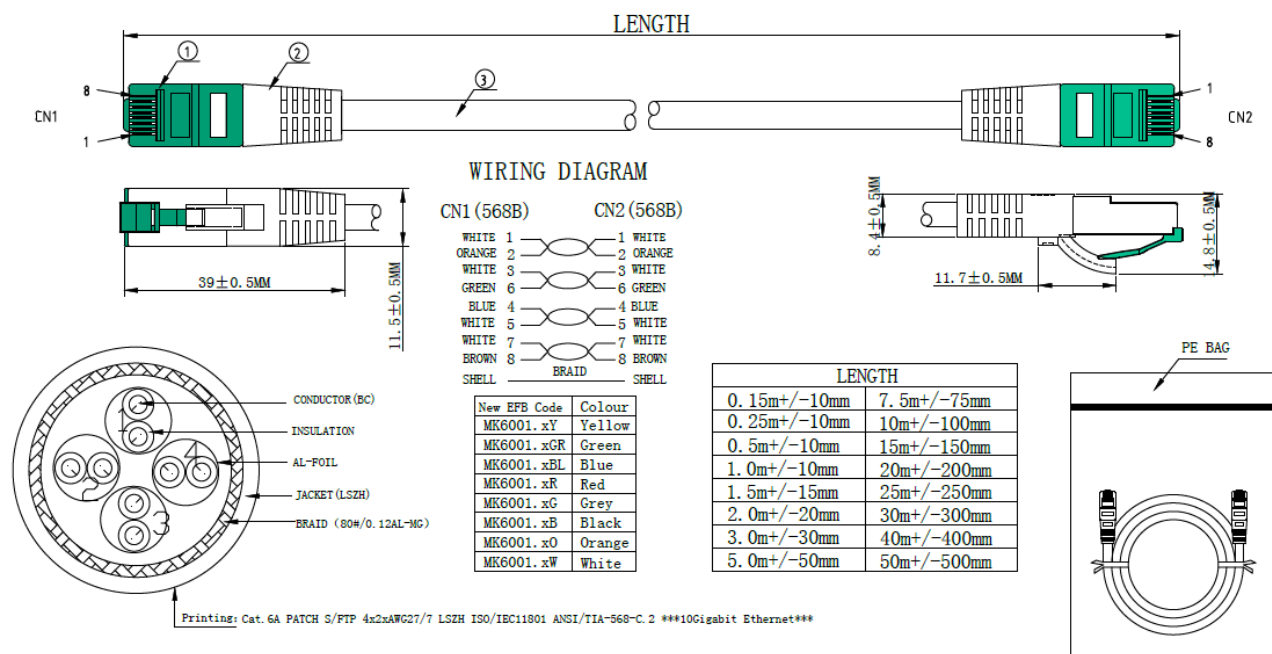

This datasheet was created automatically on 28-11-2025 . Technical changes reserved.