


# DATASHEET

## RJ45 Patch Cord Cat.6A S/FTP LSZH grey 1m

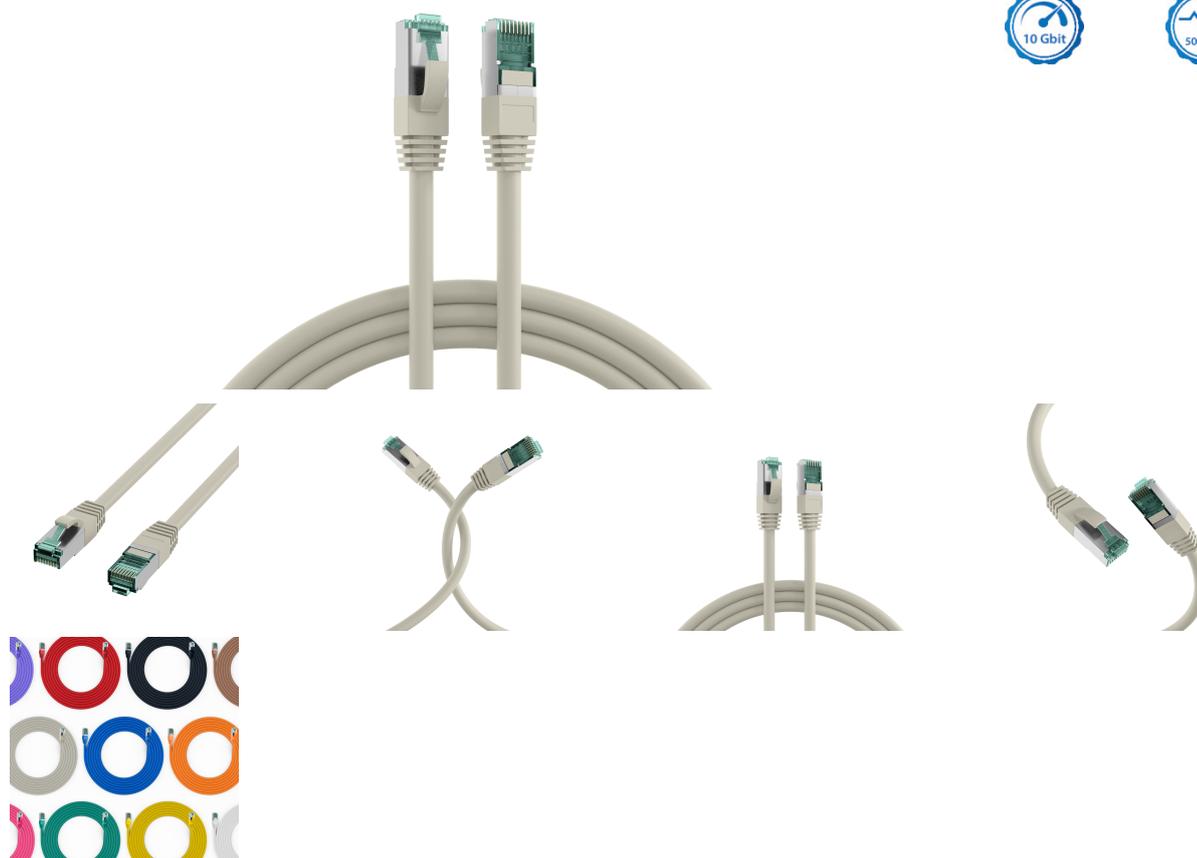

### General data

This Cat.6A (TIA) data cable from the EFB-Elektronik brand supports data transmissions up to 10Gbit. The S/FTP shielding reliably protects against interference and ensures high signal quality. Since it is a Cat.6A (TIA) network cable, it supports a frequency range of up to 500MHz, which enables high data transmission performance.

- Increase interference immunity in electromagnetically charged environments - double shielding (S/FTP) improves EMC reserve, reduces susceptibility to radiation and stabilizes transmission in parallel cable routing.
- Cover fire protection requirements in compliance with standards - flame-retardant cable behaviour according to IEC60332-1 reduces the spread of fire in the event of a fault and supports compliance with common installation specifications.
- Power and connect end devices via one cable - reduces cabling effort because data and power are transmitted via 4PPoE according to IEEE802.3bt on one line (fewer power supplies/sockets, faster installation).

### Product Description

This datasheet was created automatically on 27-03-2026 . Technical changes reserved.



# DATASHEET

## RJ45 Patch Cord Cat.6A S/FTP LSZH grey 1m

The S/FTP patch cable has double shielding, which effectively reduces electromagnetic interference. The temperature range of the cable is -20 - 60 °C. The wide range of possible applications is supported by the bending radius of >30 mm. The network cable is IP20 rated. The LSZH jacket is halogen-free and low-smoke. In the event of a fire, it minimizes smoke development and increases indoor safety.

### Technical details

- Cat.6A (TIA)
- Connector: RJ45 8(8) to RJ45 8(8) with green RJ45 connectors
- Shielding: S/FTP cable with 4x2 x AWG27/7
- Cable shape: round
- Pin assignment: 1:1 according to TIA/EIA 568B
- Equivalent to PoE class: PoE to IEEE802.3af, PoE+ to IEEE802.3at, and 4PPoE to IEEE802.3bt
- Gold-plated contacts
- Sheath: LSZH sheath material
- Outer diameter: 6.0 mm
- With an injected anti-kink grommet
- Fire protection: flame-retardant according to IEC60332-1, low-smoke according to IEC61034, halogen-free according to IEC60754-2
- Degree of protection: IP20
- With a punctual screen contact
- With locking lever protection
- Mating cycles: ≥750
- With length print
- Brand: EFB-Elektronik

### Technical properties

AWG-size	27/7
Allocation	acc. TIA/EIA 568B
Anti-kink sleeve	moulded-on
Area of application	Industrial Ethernet
Bending radius	>30 mm
Cable construction	4x2
Cable shape	round
Cable type	S/FTP
Cabling standard	EN50173
Category	6A (TIA)
Colour anti-kink sleeve	grey
Colour outer sheath	grey
Conductive shield	Selected shield contact
Conductor Material	Copper
Conductor resistance DC	185 Ω/km
Connector	IEC 60603-7-51

This datasheet was created automatically on 27-03-2026 . Technical changes reserved.



# DATASHEET

## RJ45 Patch Cord Cat.6A S/FTP LSZH grey 1m

Connector type	RJ45 standard green
Contact Resistance	30 mΩ
Contacts	Gold plated
Current capacity	max. 1 A
Fire retardant version	acc. IEC60332-1
Halogen free	acc. IEC60754-2
Harmonised Standard	EN 50575
Impedance	100 ±15 Ω
Insulation Resistance	10 MΩ
Jacket material	LSZH
Length imprint	True
Locking lever	True
Loop resistance	370 Ω/km
Low smoke	acc. IEC61034
Mating cycles	≥750
Model	shielded
NVP value	74 %
Oil resistant	no
Operating Temperature	-20 - 60 °C
Operating-/ tempering voltage	max. 50 V DC
Outer diameter of the cable	6.0 mm
Ozone resistance	No
Pin assignment	1:1
Printing	Cat.6A PATCH S/FTP 4x2xAWG27/7 LSZH ISO/IEC11801 ANSI/TIA-568-C.2 ***10Gigabit Ethernet*** www.efb-elektronik.de
Raw cable	Cat.6A
Resistance unbalance	< 3 %
Resistant to chemicals	False
Silicone-free	True
Suitable for degree of protection (IP)	IP20
Tape width	500MHz
Test voltage	1000 (V DC, 1min) core/core und core/screen
Total screening	80 %
Transmission	10Gbit
Type of connector connection 1	RJ45 8(8)
Type of connector connection 2	RJ45 8(8)

This datasheet was created automatically on 27-03-2026 . Technical changes reserved.



# DATASHEET

## RJ45 Patch Cord Cat.6A S/FTP LSZH grey 1m

UL approbated	False
UV resistant	no

### Available variants

ArtNr.	Bezeichnung	Length	POE class	Length tolerance
MK6001.0,15G	RJ45 Patch Cord Cat.6A S/FTP LSZH grey 0,15m	0.15 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
MK6001.0,25G	RJ45 Patch Cord Cat.6A S/FTP LSZH grey 0,25m	0.25 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
MK6001.0,5G	RJ45 Patch Cord Cat.6A S/FTP LSZH grey 0,5m	0.5 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
MK6001.1G	RJ45 Patch Cord Cat.6A S/FTP LSZH grey 1m	1.0 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
MK6001.1,5G	RJ45 Patch Cord Cat.6A S/FTP LSZH grey 1,5m	1.5 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
MK6001.2G	RJ45 Patch Cord Cat.6A S/FTP LSZH grey 2m	2.0 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
MK6001.3G	RJ45 Patch Cord Cat.6A S/FTP LSZH grey 3m	3.0 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
MK6001.5G	RJ45 Patch Cord Cat.6A S/FTP LSZH grey 5m	5.0 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
MK6001.7,5G	RJ45 Patch Cord Cat.6A S/FTP LSZH grey 7,5 m	7.5 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
MK6001.10G	RJ45 Patch Cord Cat.6A S/FTP LSZH grey 10m	10.0 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
MK6001.15G	RJ45 Patch Cord Cat.6A S/FTP LSZH grey 15m	15.0 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at	±5 %
MK6001.20G	RJ45 Patch Cord Cat.6A S/FTP LSZH grey 20m	20.0 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at	±5 %
MK6001.25G	RJ45 Patch Cord Cat.6A S/FTP LSZH grey 25m	25.0 m	PoE acc. to IEEE802.3af	±5 %
MK6001.30G	RJ45 Patch Cord Cat.6A S/FTP LSZH grey 30m	30.0 m	PoE acc. to IEEE802.3af	±5 %
MK6001.40G	RJ45 Patch Cord Cat.6A S/FTP LSZH grey 40m	40.0 m	No	±5 %
MK6001.50G	RJ45 Patch Cord Cat.6A S/FTP LSZH grey 50m	50.0 m	No	±5 %


### Drawings

This datasheet was created automatically on 27-03-2026 . Technical changes reserved.



# DATASHEET

## RJ45 Patch Cord Cat.6A S/FTP LSZH grey 1m

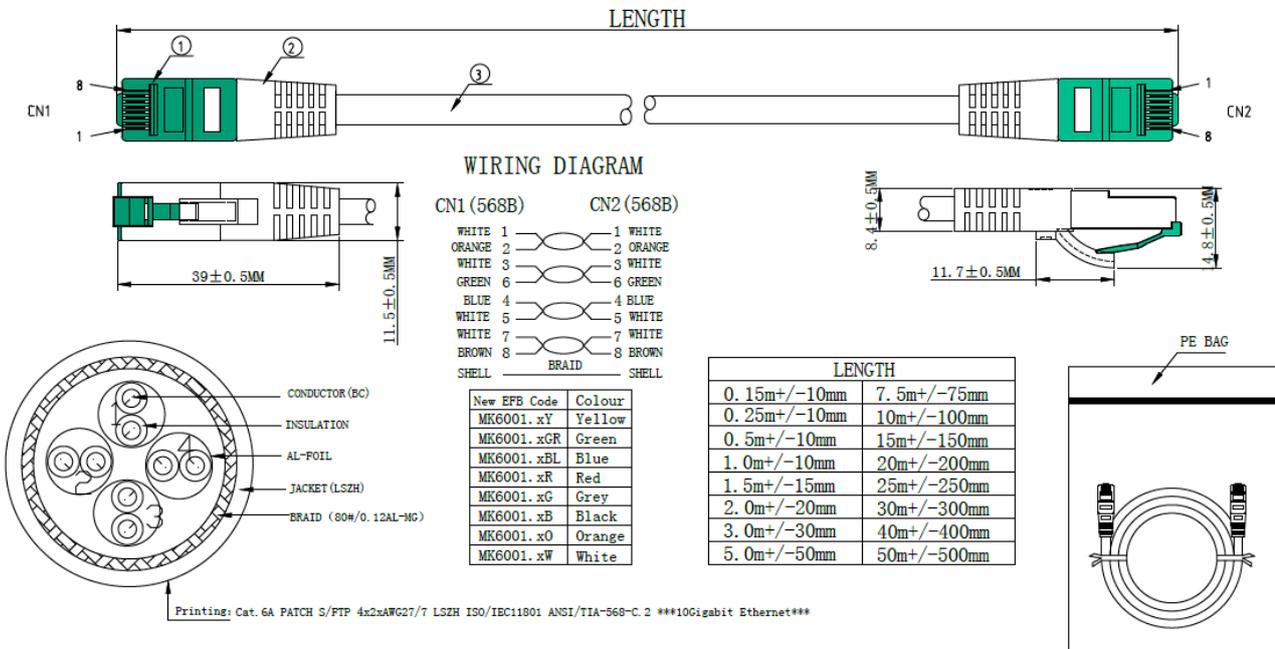

This datasheet was created automatically on 27-03-2026 . Technical changes reserved.

