


DATASHEET

R&M Duplex Patchcable E2000™ /APC-LC OS2 10m 3mm yellow G657A1 Grade C

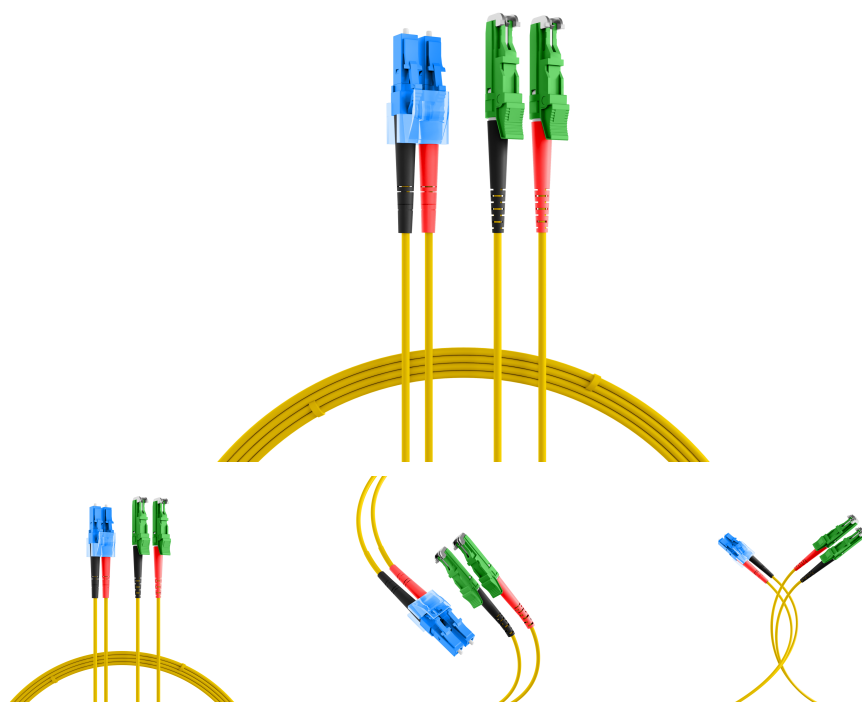

General data

Fiber jumper are well defined components in international standard of structured cabling ISO/IEC11801. Due to many different network protocols created in the last 25 years , also a wide range of connectors had been developed. Some of them are still important today: LC, SC, E2000®, MPO/MTP.

Fiber jumper (patchcord) are defined as shortest connection between passive interface and active deviceport, regarding structured cabling standard. Rating of performance, known as category, as well as performance of total transmission channel, known as link class, Similar descriptions for patchcords: Connection cable, drop cable, adapter cable, interconnecting cord, Jumper

Features of EFB fiber optic patch cables

Tension relief reinforced with aramid yarn

Halogen-free and flame-retardant sheath according to IEC-60754-2, IEC-60332-1 and IEC-61034

Technical properties

Anti-kink sleeve	put-on
Bend optimized fiber	yes
Cable structure	Duplex
Cable type	Simplex

This datasheet was created automatically on 14-04-2026 . Technical changes reserved.



DATASHEET

R&M Duplex Patchcable E2000™ /APC-LC OS2 10m 3mm yellow G657A1 Grade C

Cable Ø	3 mm
Category	OS2 G657A1
Colour outer sheath	yellow
Fibre type	Single mode 9/125
Flame retardant	acc. to IEC 60332-1
Halogen free	acc. to IEC 60754-2
Insertion loss 1310nm	≤ 0,25 dB
Insertion loss 1550nm	≤ 0,25 dB
Jacket material	LSZH
Low smoke	acc. to IEC 61034-1
Min. Bending radius (Dynamic)	50mm mm
Min. Bending radius (Static)	30mm mm
Number of fibers	2
Operating Temperature	-20 - 70 °C
Packaging	EFB-Electronics poly bag (resealable)
Reinforcement	Aramid
Return loss 1550nm	≥45 dB
Return loss 1310nm	≥45 dB
Scope of delivery	1x Patchcable, 2x Duplex Clip, 1x Measurement Report, 1x Information Sheet
Storage Temperature	-25 - 60 °C
Type of connector connection 1	E2000™/APC
Type of connector connection 2	LC

Available variants

ArtNr.	Bezeichnung	Outer diameter		Length tolerance
		Length	sheath single fibre	
00937.0,5	R&M Duplex Patchcable E2000™/APC-LC OS2 0,5m 3mm yellow G657A1 Grade C	0.5 m	3.0 mm	±5 %
00937.1	R&M Duplex Patchcable E2000™/APC-LC OS2 1m 3mm yellow G657A1 Grade C	1.0 m	3.0 mm	±5 %
00937.2	R&M Duplex Patchcable E2000™/APC-LC OS2 2m 3mm yellow G657A1 Grade C	2.0 m	3.0 mm	±5 %
00937.3	R&M Duplex Patchcable E2000™/APC-LC OS2 3m 3mm yellow G657A1 Grade C	3.0 m	3.0 mm	±5 %

This datasheet was created automatically on 14-04-2026 . Technical changes reserved.




DATASHEET

R&M Duplex Patchcable E2000™ /APC-LC OS2 10m 3mm yellow G657A1 Grade C

00937.5	R&M Duplex Patchcable E2000™/APC-LC OS2 5m 3mm yellow G657A1 Grade C	5.0 m	3.0 mm	±5 %
00937.7,5	R&M Duplex Patchcable E2000™/APC-LC OS2 7,5m 3mm yellow G657A1 Grade C	7.5 m	3.0 mm	±5 %
00937.10	R&M Duplex Patchcable E2000™/APC-LC OS2 10m 3mm yellow G657A1 Grade C	10.0 m	3.0 mm	±5 %
00937.15	R&M Duplex Patchcable E2000™/APC-LC OS2 15m 3mm yellow G657A1 Grade C	15.0 m	3.0 mm	±5 %
00937.20	R&M Duplex Patchcable E2000™/APC-LC OS2 20m 3mm yellow G657A1 Grade C	20.0 m	3.0 mm	±5 %
00937.25	R&M Duplex Patchcable E2000™/APC-LC OS2 25m 3mm yellow G657A1 Grade C	25.0 m	3.0 mm	±5 %
00937.30	R&M Duplex Patchcable E2000™/APC-LC OS2 30m 3mm yellow G657A1 Grade C	30.0 m	3.0 mm	±5 %

Drawings

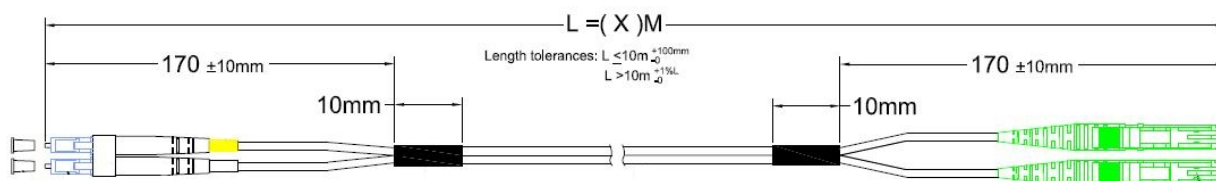

This datasheet was created automatically on 14-04-2026 . Technical changes reserved.